




Wire Map (T568B)





Länge (m)	[Paar 12]	1.8
Laufzeit (ns), Grnz. 555		8
Abweichung (ns), Grnz. 50		0
Widerstand (Ohm), Grnz. 25.0		0.7
Einfüg.-Dämpf. Reserve (dB)	[Paar 78]	45.0
Frequenz (MHz)	[Paar 78]	445.0
Grenzwert (dB)	[Paar 78]	46.3





	Min. Abstand	Min. Wert	MAIN	SR	MAIN	SR
Schlechtest Paar	12-36	12-36	12-36	12-36	12-36	12-36
NEXT (dB)	18.3	17.2	18.3	17.2	18.3	17.2
Freq. (MHz)	470.0	471.0	470.0	471.0	470.0	471.0
Grenzwert (dB)	28.4	28.3	28.4	28.3	28.4	28.3
Schlechtest Paar	36	36	36	36	36	36
PS NEXT (dB)	17.7	16.4	17.7	16.4	17.7	16.4
Freq. (MHz)	469.0	470.0	469.0	470.0	469.0	470.0
Grenzwert (dB)	25.3	25.3	25.3	25.3	25.3	25.3





	MAIN	SR	MAIN	SR	MAIN	SR
Schlechtest Paar	36-78	36-78	36-78	36-78	36-78	36-78
ACR-F (dB)	22.5	22.1	22.6	22.1	22.5	22.1
Freq. (MHz)	451.0	452.0	500.0	453.0	451.0	452.0
Grenzwert (dB)	10.2	10.2	9.3	10.1	10.2	10.1
Schlechtest Paar	36	36	36	36	36	36
PS ACR-F (dB)	22.9	24.2	22.9	24.2	22.9	24.2
Freq. (MHz)	470.0	470.0	470.0	470.0	470.0	470.0
Grenzwert (dB)	6.8	6.8	6.8	6.8	6.8	6.8






	MAIN	SR	MAIN	SR	MAIN	SR
Schlechtest Paar	12-36	12-36	12-36	12-36	12-36	12-36
ACR-N (dB)	28.0	27.6	65.4	64.3	28.0	27.6
Freq. (MHz)	3.0	3.1	470.0	471.0	3.0	3.1
Grenzwert (dB)	61.0	60.8	-19.3	-19.4	61.0	60.8
Schlechtest Paar	36	36	36	36	36	36
PS ACR-N (dB)	27.0	27.3	64.7	63.5	27.0	27.3
Freq. (MHz)	3.3	3.1	469.0	470.0	3.3	3.1
Grenzwert (dB)	58.0	58.0	-22.3	-22.4	58.0	58.0



	MAIN	SR	MAIN	SR	MAIN	SR
Schlechtest Paar	78	78	78	78	78	78
RL (dB)	6.2	6.4	8.9	6.4	6.2	6.4
Freq. (MHz)	1.0	454.0	439.0	454.0	1.0	454.0
Grenzwert (dB)	19.0	6.0	6.0	6.0	19.0	6.0



Erfüllte Network Standards:
10BASE-T
100BASE-T
ATM-51
TR-4
100BASE-TX
100BASE-T
ATM-155
TR-16 Active
100BASE-T4
ATM-25
100VG-AnyLan
TR-16 Passive

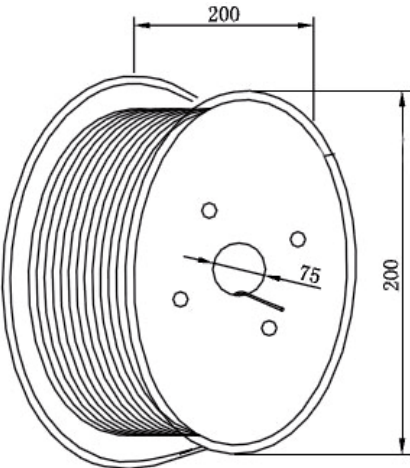

Imprint	Systemcable S/FTP CAT6A 500 Mhz . PIMF - HALOGENFREE
Jacket	OD = 7,6 mm LSZH-Grey
Cable	Overall Shielding Alu Foil 0,025 Single-Braiding 80 x 0,12mm Aluminium - AWG 23/1 Cu - PIMF

