Artikel-Nr.: 0204010

Bez.: Mini-DIN-Kupplung 4-pol., S-VHS

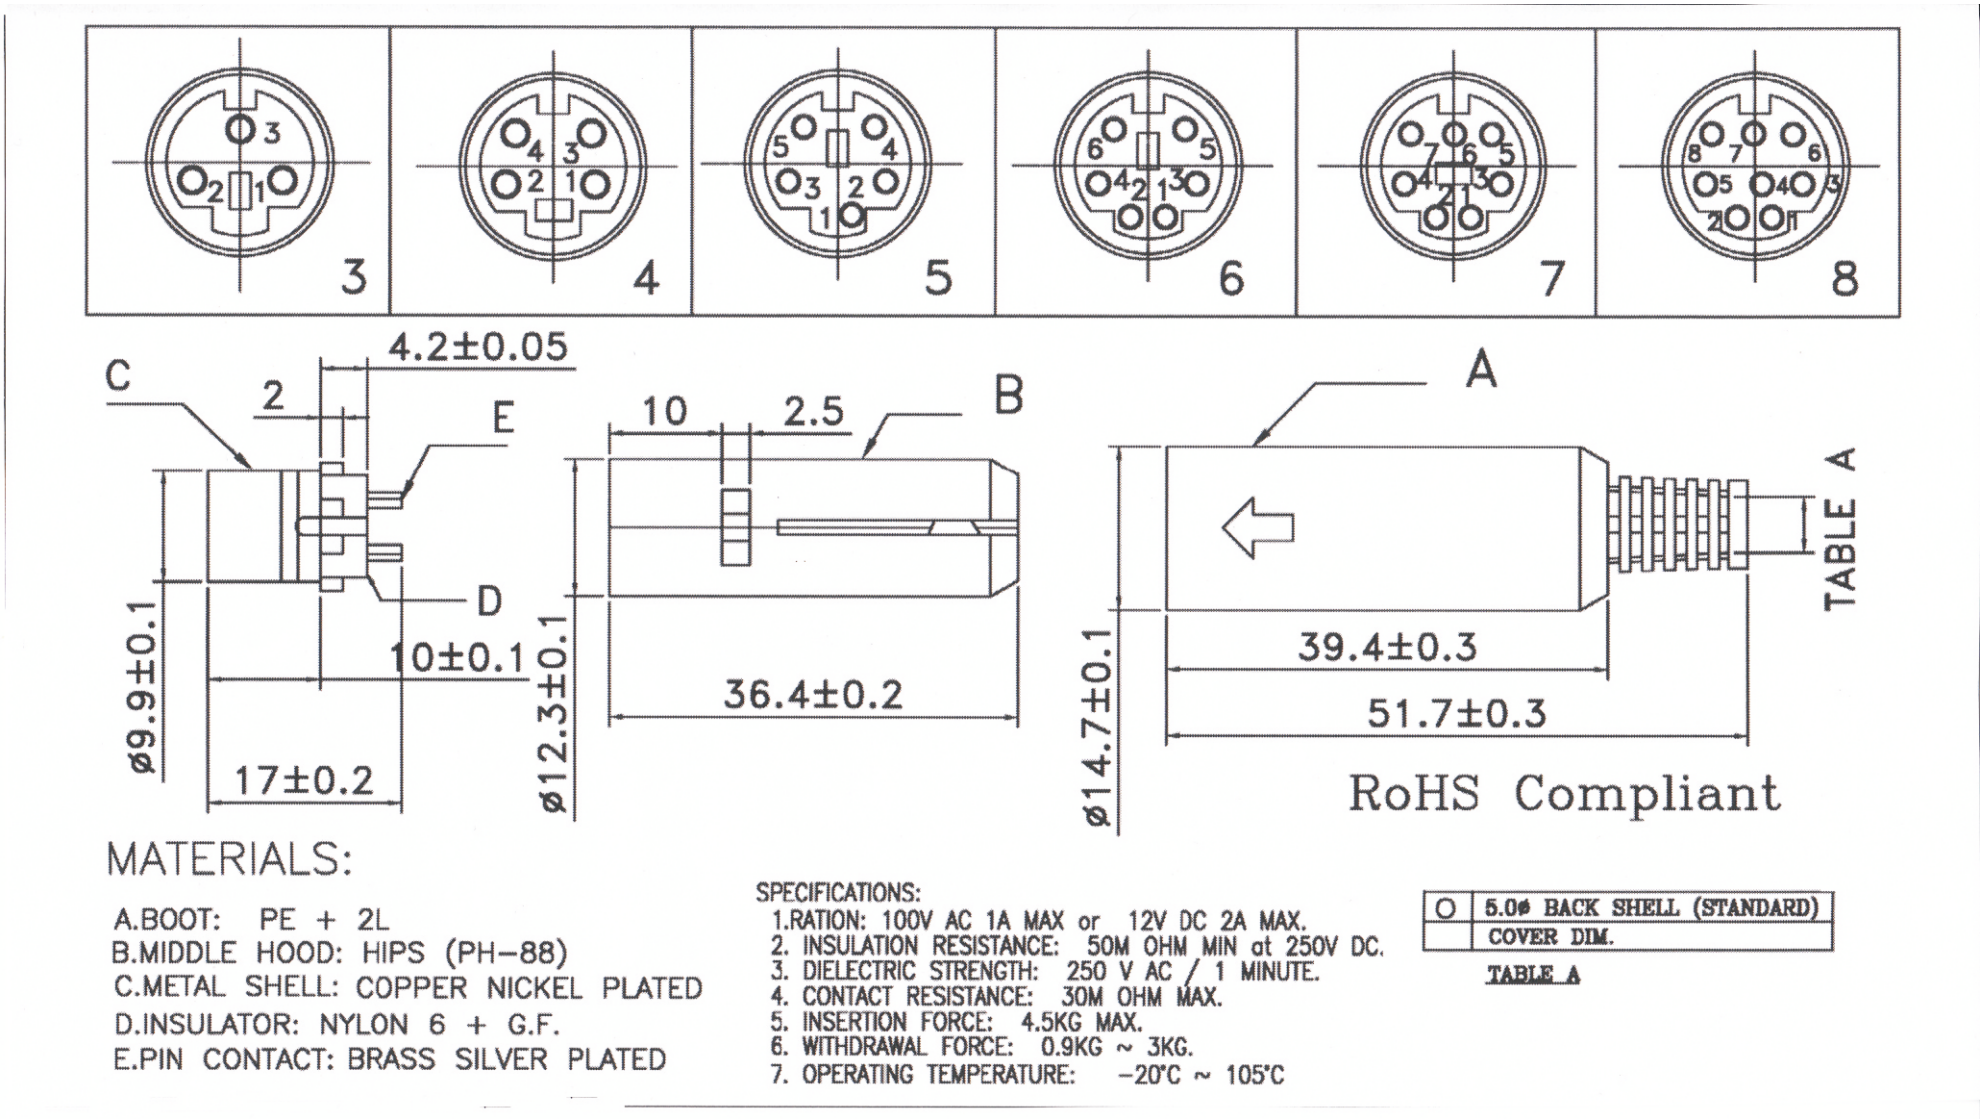

MATERIALS:

A.BOOT: PE + 2L
B.MIDDLE HOOD: HIPS (PH-88)
C.METAL SHELL: COPPER NICKEL PLATED
D.INSULATOR: NYLON 6 + G.F.
E.PIN CONTACT: BRASS SILVER PLATED

SPECIFICATIONS:
1. RATION: 100V AC 1A MAX or 12V DC 2A MAX.
2. INSULATION RESISTANCE: 50M OHM MIN at 250V DC.
3. DIELECTRIC STRENGTH: 250 V AC / 1 MINUTE.
4. CONTACT RESISTANCE: 30M OHM MAX.
5. INSERTION FORCE: 4.5KG MAX.
6. WITHDRAWAL FORCE: 0.9KG ~ 3KG.
7. OPERATING TEMPERATURE: -20°C ~ 105°C

O	5.0ø BACK SHELL (STANDARD)
	COVER DIM.

TABLE A

www.bkl-electronic.de
Die Angaben auf unseren Datenblättern erfolgen nach bestem Wissen. Sie sind nur ein unverbindlicher Hinweis und dienen als Anhaltspunkt für Planungen.
Sie befreien den Anwender nicht von eigener Prüfung der von uns gelieferten Produkte auf ihre Eignung für die beabsichtigten Anwendungszwecke.
Änderungen behalten wir uns vor, falls neue Erkenntnisse dies erforderlich machen. Ausführungen können variieren.
Sollten Sie ein Muster benötigen kontaktieren Sie uns bitte.
BKL-Electronic Kreimendahl GmbH · Märkenstück 14 · 58509 Lüdenscheid
Tel: +49 (0)2351-3621-0 · Fax: +49 (0)2351-3621-29 · info@bkl-electronic.de