


Artikel-Nr.:10120816

Bez.:Buchsenleiste 2 x 25 polig , vergoldet , Raster 2,54mm , nicht trennbar

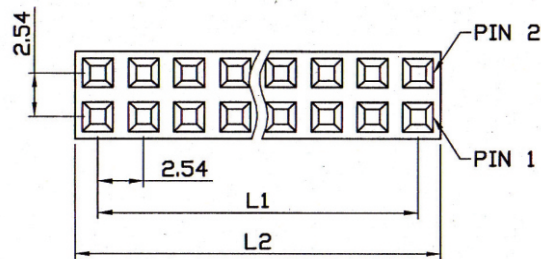

SPECIFICATIONS

Current Rating: 3 Amp

Insulation Resistance: 1000MΩ Min

Dielectric Withstanding: 600V AC/DC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C

MATERIALS

Contact Material: Phosphor Bronze




Insulation Material: Polyester, UL 94V-0

P.B.T or Nylon-6T

Contact Plating: Full Gold, Full Tin, Selective Plated

Standard: Gold Flash all Over Nickel


All materials must be RoHS compliant.

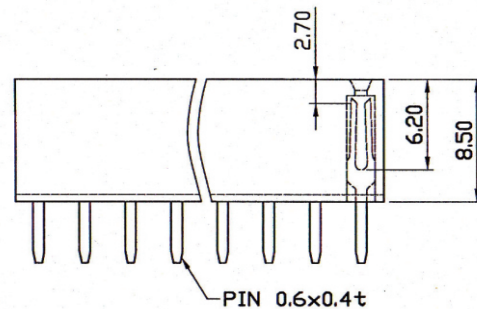

DIMENSIONS:

L1 = 2.54 x (No. of Contacts-1)

L2 = 0.5 + 2.54 x No. of Positions



Recommended P.C.Board Layout

www.bkl-electronic.de

Technische Änderungen vorbehalten. Ausführungen können variieren. Sollten Sie ein Muster benötigen kontaktieren Sie uns bitte.

BKL-ELECTRONIC Kreimendahl GmbH • Märkenstück 14 • 58509 Lüdenscheid

Tel: +49 (0)2351-3621-0 • Fax: +49 (0)2351-3621-29 • info@bkl-electronic.de

